


# Адаптеры Coromant Carpo® с креплением по DIN 2080



|                   |                   |      |      |      | Размеры, мм, дюйм |                    |       |                 |                 |                 |                 |             |      |  |
|-------------------|-------------------|------|------|------|-------------------|--------------------|-------|-----------------|-----------------|-----------------|-----------------|-------------|------|--|
| CZC <sub>MS</sub> | CZC <sub>WS</sub> | CNSC | CXSC | DSGN | Код заказа        | DCON <sub>WS</sub> | LF    | LB <sub>1</sub> | LB <sub>2</sub> | BD <sub>1</sub> | BD <sub>2</sub> | CP<br>B PSI | Kg   |  |
| 40                | C3                | 1    | 1    | 2    | C3-390.00-40 030  | 32.0               | 30.0  | 18.4            | 30.0            | 32.0            | 63.0            | 80          | 0.80 |  |
|                   |                   |      |      |      |                   | 1.260              | 1.181 | .724            | 1.181           | 1.260           | 2.480           | 1160        |      |  |
|                   | C4                | 1    | 1    | 2    | C4-390.00-40 030  | 40.0               | 30.0  | 18.4            | 30.0            | 40.0            | 63.0            | 80          | 0.70 |  |
|                   |                   |      |      |      |                   | 1.575              | 1.181 | .724            | 1.181           | 1.575           | 2.480           | 1160        |      |  |
|                   | C4                | 1    | 1    | 2    | C4-390.00-40 060  | 40.0               | 60.0  | 48.4            | 60.0            | 40.0            | 63.0            | 80          | 0.80 |  |
|                   |                   |      |      |      |                   | 1.575              | 2.362 | 1.906           | 2.362           | 1.575           | 2.480           | 1160        |      |  |
|                   | C5                | 1    | 1    | 2    | C5-390.00-40 030  | 50.0               | 30.0  | 18.4            | 30.0            | 50.0            | 63.0            | 80          | 0.90 |  |
|                   |                   |      |      |      |                   | 1.969              | 1.181 | .724            | 1.181           | 1.969           | 2.480           | 1160        |      |  |
|                   | C5                | 1    | 1    | 2    | C5-390.00-40 070  | 50.0               | 70.0  | 58.4            | 70.0            | 50.0            | 63.0            | 80          | 1.35 |  |
|                   |                   |      |      |      |                   | 1.969              | 2.756 | 2.299           | 2.756           | 1.969           | 2.480           | 1160        |      |  |
|                   | C6                | 1    | 1    | 1    | C6-390.00-40 075  | 63.0               | 75.0  | 75.0            |                 | 63.0            |                 | 80          | 3.80 |  |
|                   |                   |      |      |      |                   | 2.480              | 2.953 | 2.953           |                 | 2.480           |                 | 1160        |      |  |
| 50                | C3                | 1    | 1    | 2    | C3-390.00-50 030  | 32.0               | 30.0  | 14.8            | 30.0            | 32.0            | 97.5            | 80          | 2.50 |  |
|                   |                   |      |      |      |                   | 1.260              | 1.181 | .583            | 1.181           | 1.260           | 3.839           | 1160        |      |  |
|                   | C3                | 1    | 1    | 2    | C3-390.00-50 060  | 32.0               | 60.0  | 44.8            | 60.0            | 32.0            | 97.5            | 80          | 2.50 |  |
|                   |                   |      |      |      |                   | 1.260              | 2.362 | 1.764           | 2.362           | 1.260           | 3.839           | 1160        |      |  |
|                   | C4                | 1    | 1    | 2    | C4-390.00-50 030  | 40.0               | 30.0  | 14.8            | 30.0            | 40.0            | 97.5            | 80          | 2.50 |  |
|                   |                   |      |      |      |                   | 1.575              | 1.181 | .583            | 1.181           | 1.575           | 3.839           | 1160        |      |  |
|                   | C4                | 1    | 1    | 2    | C4-390.00-50 060  | 40.0               | 60.0  | 44.8            | 60.0            | 40.0            | 97.5            | 80          | 2.50 |  |
|                   |                   |      |      |      |                   | 1.575              | 2.362 | 1.764           | 2.362           | 1.575           | 3.839           | 1160        |      |  |
|                   | C5                | 1    | 1    | 2    | C5-390.00-50 030  | 50.0               | 30.0  | 14.8            | 30.0            | 50.0            | 97.5            | 80          | 2.43 |  |
|                   |                   |      |      |      |                   | 1.969              | 1.181 | .583            | 1.181           | 1.969           | 3.839           | 1160        |      |  |
|                   | C5                | 1    | 1    | 2    | C5-390.00-50 070  | 50.0               | 70.0  | 54.8            | 70.0            | 50.0            | 97.5            | 80          | 3.10 |  |
|                   |                   |      |      |      |                   | 1.969              | 2.756 | 2.157           | 2.756           | 1.969           | 3.839           | 1160        |      |  |
|                   | C6                | 1    | 1    | 2    | C6-390.00-50 030  | 63.0               | 30.0  | 14.8            | 30.0            | 63.0            | 97.5            | 80          | 2.41 |  |
|                   |                   |      |      |      |                   | 2.480              | 1.181 | .583            | 1.181           | 2.480           | 3.839           | 1160        |      |  |
|                   | C6                | 1    | 1    | 2    | C6-390.00-50 080  | 63.0               | 80.0  | 64.8            | 80.0            | 63.0            | 97.5            | 80          | 3.42 |  |
|                   |                   |      |      |      |                   | 2.480              | 3.150 | 2.551           | 3.150           | 2.480           | 3.839           | 1160        |      |  |
|                   | C8                | 1    | 1    | 2    | C8-390.00-50 070  | 80.0               | 70.0  | 54.8            | 70.0            | 80.0            | 97.5            | 80          | 5.00 |  |
|                   |                   |      |      |      |                   | 3.150              | 2.756 | 2.157           | 2.756           | 3.150           | 3.839           | 1160        |      |  |
|                   | C8                | 1    | 1    | 2    | C8-390.00-50 120  | 80.0               | 120.0 | 104.8           | 120.0           | 80.0            | 97.5            | 80          | 5.60 |  |
|                   |                   |      |      |      |                   | 3.150              | 4.724 | 4.126           | 4.724           | 3.150           | 3.839           | 1160        |      |  |

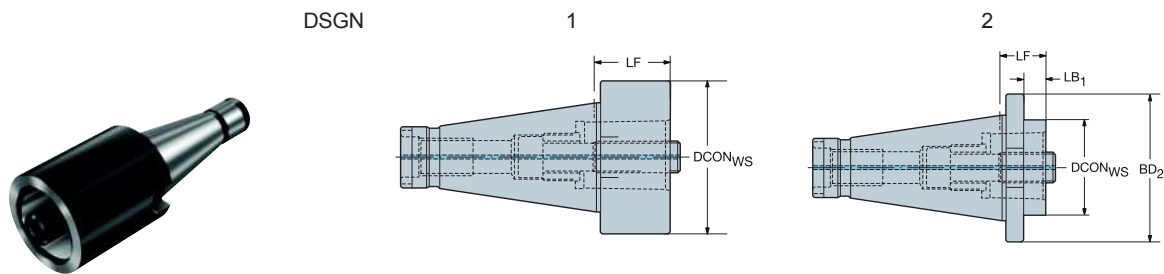


Q1



Q35

## Адаптеры Coromant Carpo® с конусом NMTB

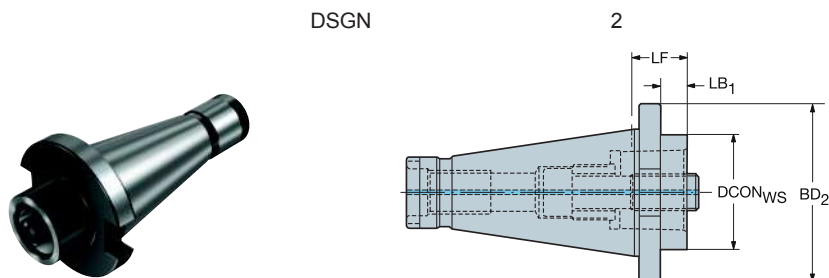

| CZC <sub>MS</sub> | CZC <sub>WS</sub> | CNCS | CXSC | DSGN | Код заказа        | Размеры, мм, дюйм  |       |                 |                 |                 |                 |      | CP<br>B PSI | Kg |
|-------------------|-------------------|------|------|------|-------------------|--------------------|-------|-----------------|-----------------|-----------------|-----------------|------|-------------|----|
|                   |                   |      |      |      |                   | DCON <sub>WS</sub> | LF    | LB <sub>1</sub> | LB <sub>2</sub> | BD <sub>1</sub> | BD <sub>2</sub> |      |             |    |
| 40                | C5                | 1    | 1    | 2    | C5-A390.00-40 030 | 50.0               | 30.0  | 20.5            | 30.0            | 50.0            | 63.7            | 80   | 1.66        |    |
|                   |                   |      |      |      |                   | 1.969              | 1.181 | .807            | 1.181           | 1.969           | 2.508           | 1160 |             |    |
| 50                | C5                | 1    | 1    | 2    | C5-A390.00-50 030 | 50.0               | 30.0  | 14.8            | 30.0            | 50.0            | 97.5            | 80   | 5.80        |    |
|                   |                   |      |      |      |                   | 1.969              | 1.181 | .583            | 1.181           | 1.969           | 3.839           | 1160 |             |    |
|                   | C5                | 1    | 1    | 2    | C5-A390.00-50 070 | 50.0               | 70.0  | 54.8            | 70.0            | 50.0            | 97.5            | 80   | 5.78        |    |
|                   |                   |      |      |      |                   | 1.969              | 2.756 | 2.157           | 2.756           | 1.969           | 3.839           | 1160 |             |    |
|                   | C6                | 1    | 1    | 2    | C6-A390.00-50 030 | 63.0               | 30.0  | 14.8            | 30.0            | 63.0            | 97.5            | 80   | 5.81        |    |
|                   |                   |      |      |      |                   | 2.480              | 1.181 | .583            | 1.181           | 2.480           | 3.839           | 1160 |             |    |
|                   | C8                | 1    | 1    | 2    | C8-A390.00-50 070 | 80.0               | 70.0  | 54.8            | 70.0            | 80.0            | 97.5            | 80   | 6.30        |    |
|                   |                   |      |      |      |                   | 3.150              | 2.756 | 2.157           | 2.756           | 3.150           | 3.839           | 1160 |             |    |



Q1






Q35

# Адаптеры Coromant Carpo® с креплением по DIN 2079

DSGN

8



|                   |                   | Размеры, мм, дюйм |      |      |                     |                    |       |                    |       |                 |                 |                 |                 |                 |                 |                   |  |                   |
|-------------------|-------------------|-------------------|------|------|---------------------|--------------------|-------|--------------------|-------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|---|-------------------|
| CZC <sub>MS</sub> | CZC <sub>WS</sub> | CNSC              | CXSC | DSGN | Код заказа          | DCON <sub>MS</sub> | DBC   | DCON <sub>WS</sub> | LF    | LB <sub>1</sub> | LB <sub>2</sub> | LB <sub>3</sub> | BD <sub>1</sub> | BD <sub>2</sub> | BD <sub>3</sub> | BHTA <sub>1</sub> |   | BHTA <sub>2</sub> |
| 40                | C3                | 0                 | 0    | 8    | C3-390.34705-40 060 | 66.7               | 66.7  | 32.0               | 60.0  | 5.0             | 22.3            | 60.0            | 32.0            | 90.0            | 110.0           | 30°               | 30°   | 4.40              |
|                   |                   |                   |      |      |                     | 2.626              | 2.626 | 1.260              | 2.362 | .197            | .878            | 2.362           | 1.260           | 3.543           | 4.331           |                   |   |                   |
|                   | C4                | 0                 | 0    | 8    | C4-390.34705-40 070 | 66.7               | 66.7  | 40.0               | 70.0  | 5.0             | 22.3            | 70.0            | 40.0            | 90.0            | 110.0           | 30°               | 30°   | 5.64              |
|                   |                   |                   |      |      |                     | 2.626              | 2.626 | 1.575              | 2.756 | .197            | .878            | 2.756           | 1.575           | 3.543           | 4.331           |                   |   |                   |

Q1



Q35

